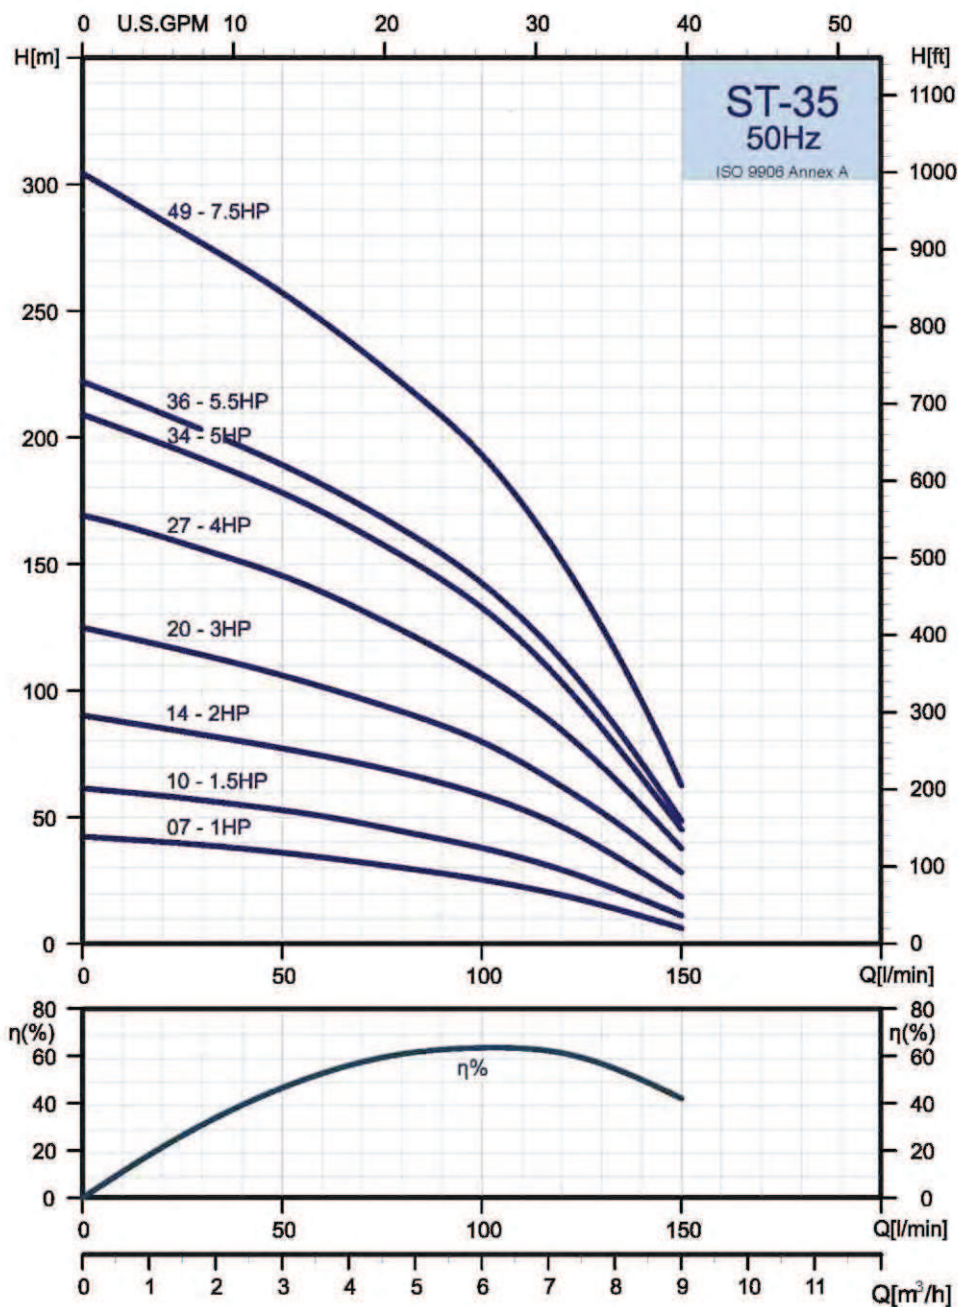


Jednofázový motor				
Rozměry a hmotnost				
Typ čerpadla	Rozměry (mm)			
	A	B	C	D
ST-3507	390	RP/ NPT 2"	98	770
ST-3510	483		98	888
ST-3514	607		98	1012
ST-3520	831		98	1326
ST-3527	1048		98	1655
ST-3534	1257		98	1940
ST-3536	1318		98	2001
ST-3549	1802		98	-

Třífázový motor				
Rozměry a hmotnost				
Typ čerpadla	Rozměry (mm)			
	A	B	C	D
ST-3507	390	RP/ NPT 2"	98	755
ST-3510	483		98	863
ST-3514	607		98	1012
ST-3520	831		98	1271
ST-3527	1048		98	1564
ST-3534	1257		98	-
ST-3536	1318		98	1925
ST-3549	1802		98	2485

Tabulka pro výběr

TYP ČERPAD LA	STUPNĚ	MOTOR		Q=VÝTLAK												ČERPAD LO	ELEKTRO ČERPADLO	
				l/min	0	45	50	60	70	80	90	100	120	140	160		Čistá hmotnost (kg)	
		KW	HP	m³/h	0	2.7	3,0	3.6	4,2	4.8	5.4	6.0	7.2	8.4	9.6		Jednofázové	Třífázové
		H=VÝTLAČNÁ VÝŠKA V METRECH																
ST-3507	7	0.75	1,0	42			36	34	32	30	28	25	19	11		3.7	12.5	11.9
ST-3510	10	1.1	1.5	62			53	51	48	45	41	38	29	18		4.6	14.6	13.5
ST-3514	14	1.5	2.0	90			77	74	71	68	63	59	46	28		5.7	17.2	15.7
ST-3520	20	2.2	3,0	125			107	102	97	92	86	80	62	40		7.5	21.5	19.1
ST-3527	27	3,0	4,0	169			145	139	131	123	115	107	84	55		9.6	29.0	24.8
ST-3534	34	3.7	5.0	208			178	170	162	153	143	132	103	66		11.6	34.3	-
ST-3536	36	4	5.5	221			190	181	173	164	154	143	112	72		12.2	35.0	27.4
ST-3549	49	5.5	7.5	302			257	246	234	222	209	193	151	96		15.9	-	35.4